

Quad Pak DC Output Modules

Features


- Four single channel I/O circuits in a single high-density package
- Designed to plug into the Quad Pak high-density I/O mounting racks
- Can be used with Optomux, Pamux, and *mistic* protocol brain boards and mounting racks as well as racks using a direct cable connection to a computer
- Each module provides up to 4,000 Vrms of optical isolation between the field devices and the control logic.

Description

Quad Pak modules contain the equivalent of four single-channel I/O circuits in a single high-density package. Each Quad Pak module is divided into two pairs of channels with each pair sharing a common connection.

The Quad Pak modules are designed to plug into the Quad Pak high-density I/O mounting racks only and cannot be plugged into single-channel racks.

Quad Pak modules are designed to work with a 5 VDC logic voltage only and can be used with Optomux, Pamux, and Mistic protocol brain boards and mounting racks as well as racks using a direct cable connection to a computer. Quad Pak modules can also be used with a Raspberry Pi, the Digital I/O Carrier Board (part number [OPTO-P1-40P](#)), and the PB16HQ mounting rack.

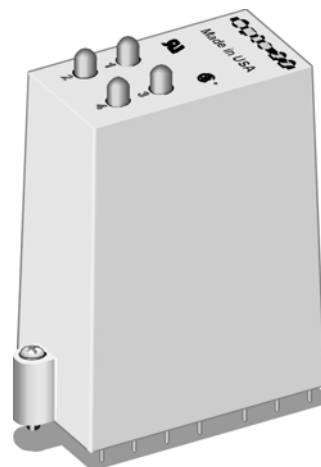

DC output modules are used for controlling or switching DC loads. Each module provides up to 4,000 Vrms of optical isolation between the field devices and the control logic.

Typical uses and applications for DC output modules include switching the following loads:

- DC Relays
- DC Solenoids
- DC Motor Starters
- DC Lamps or Indicators

All Quad Pak DC outputs are current sourcing outputs. The module connection to the load is the positive connection.

Part Numbers

Part	Description
ODC5Q	4-Channel DS Output 5-60 VDC, 5 VDC Logic
ODC5AQ	4-Channel DS Output 5-200 VDC, 5 VDC Logic


Quad Pak DC Output Modules

Specifications


	Units	ODC5Q	ODC5AQ
Line Voltage - Maximum	VDC	60	200
Operating Voltage Range	VDC	5-60	5-200
Current Rating (per channel)			
@ 20 °C Ambient	Amps	3	1
@ 45 °C Ambient	Amps	2	1
@ 70 °C Ambient	Amps	1	0.55
Off-state Leakage @ Maximum Voltage	mA	1	2
Logic Voltage - Nominal	VDC	5	5
Logic Voltage Range (Vcc)	VDC	4-8	4-8
Logic Pickup Voltage	VDC	4.0	4.0
Logic Dropout Voltage	VDC	2.3	2.3
Logic Input Current @ Nominal Logic Voltage	mA	12	12
Control Resistance	Ohms	220	220
One-Second Surge Amps	5	5	
Operating Ambient Temperature	°C	-30 to 70	-30 to 70
Isolation Input-to-Output	Vrms	4,000	4,000
Turn-on Time	µs	100	100
Turn-off Time	µs	750	750
Output Voltage Drop Maximum	Volts	1.6	1.6



Quad Pak DC Output Modules

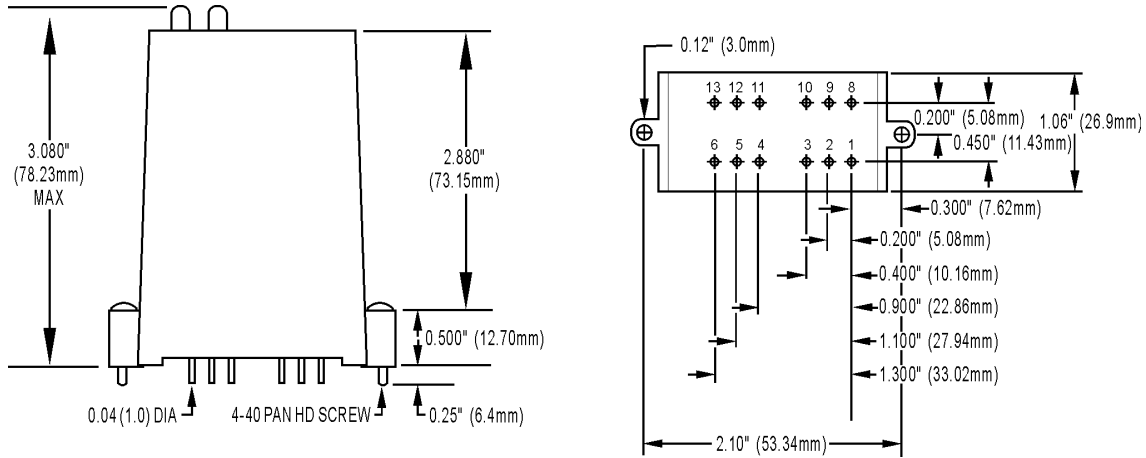Dimensions

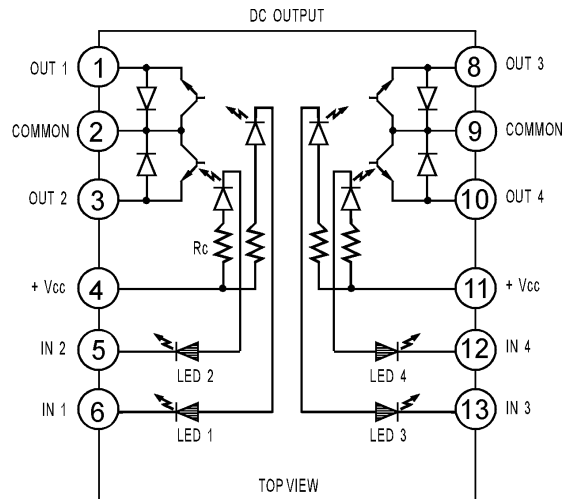

Schematics



-  RED INDICATOR LED
-  INFRARED COUPLER LED
- EQUIVALENT CIRCUIT ONLY
- NEGATIVE TRUE LOGIC
- INDUCTIVE LOADS MUST BE DIODE SUPPRESSED

Quad Pak DC Output Modules

Connections

