


OPTO 22

IMPORTANT: Check voltage before use.

Current SNAP-PAC-S1 controllers have an 8–32 VDC input range, but earlier SNAP-PAC-S1 controllers use an 8–24 VDC input range. **Before applying power to the controller, confirm that the input voltage is within the voltage range shown on the faceplate.** The voltage input rating can also be determined based on the SNAP-PAC-S1's serial number as follows:

- ▶ SNAP-PAC-S1 controllers with serial number 500000 and higher have an 8–32 VDC voltage input rating.
- ▶ SNAP-PAC-S1 controllers with serial numbers lower than 500000 have an 8–24 VDC input rating. **Using an input voltage above this range will cause damage that is not covered by the warranty.**

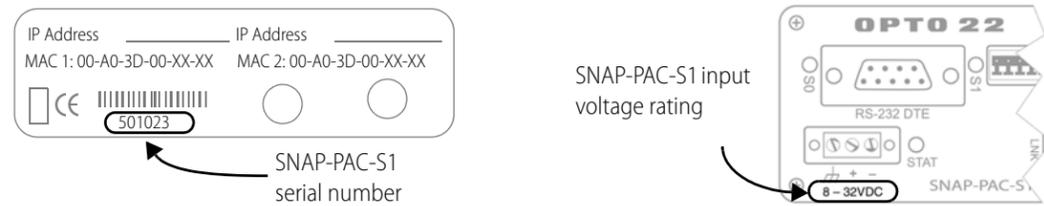


Form 1679-121214 © 2012 Opto 22

OPTO 22

IMPORTANT: Check voltage before use.

Current SNAP-PAC-S1 controllers have an 8–32 VDC input range, but earlier SNAP-PAC-S1 controllers use an 8–24 VDC input range. **Before applying power to the controller, confirm that the input voltage is within the voltage range shown on the faceplate.** The voltage input rating can also be determined based on the SNAP-PAC-S1's serial number as follows:

- ▶ SNAP-PAC-S1 controllers with serial number 500000 and higher have an 8–32 VDC voltage input rating.
- ▶ SNAP-PAC-S1 controllers with serial numbers lower than 500000 have an 8–24 VDC input rating. **Using an input voltage above this range will cause damage that is not covered by the warranty.**

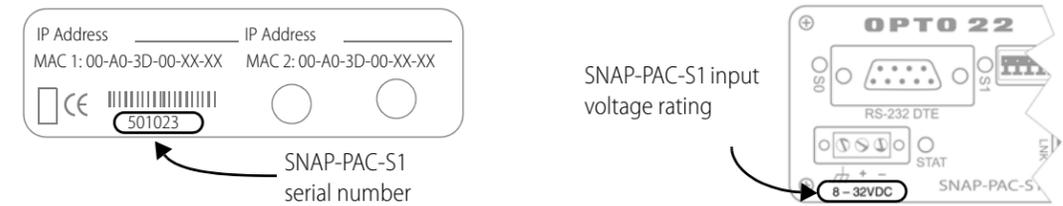


Form 1679-121214 © 2012 Opto 22

OPTO 22

IMPORTANT: Check voltage before use.

Current SNAP-PAC-S1 controllers have an 8–32 VDC input range, but earlier SNAP-PAC-S1 controllers use an 8–24 VDC input range. **Before applying power to the controller, confirm that the input voltage is within the voltage range shown on the faceplate.** The voltage input rating can also be determined based on the SNAP-PAC-S1's serial number as follows:

- ▶ SNAP-PAC-S1 controllers with serial number 500000 and higher have an 8–32 VDC voltage input rating.
- ▶ SNAP-PAC-S1 controllers with serial numbers lower than 500000 have an 8–24 VDC input rating. **Using an input voltage above this range will cause damage that is not covered by the warranty.**

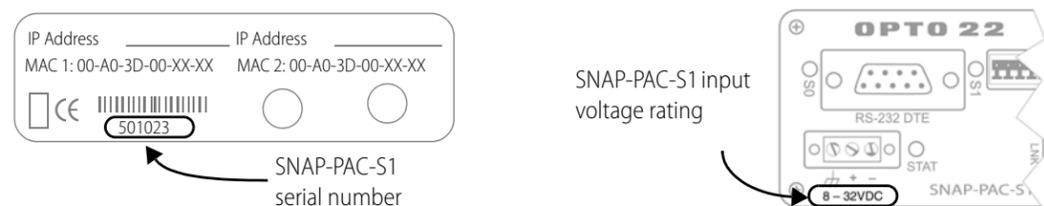


Form 1679-121214 © 2012 Opto 22

OPTO 22

IMPORTANT: Check voltage before use.

Current SNAP-PAC-S1 controllers have an 8–32 VDC input range, but earlier SNAP-PAC-S1 controllers use an 8–24 VDC input range. **Before applying power to the controller, confirm that the input voltage is within the voltage range shown on the faceplate.** The voltage input rating can also be determined based on the SNAP-PAC-S1's serial number as follows:

- ▶ SNAP-PAC-S1 controllers with serial number 500000 and higher have an 8–32 VDC voltage input rating.
- ▶ SNAP-PAC-S1 controllers with serial numbers lower than 500000 have an 8–24 VDC input rating. **Using an input voltage above this range will cause damage that is not covered by the warranty.**

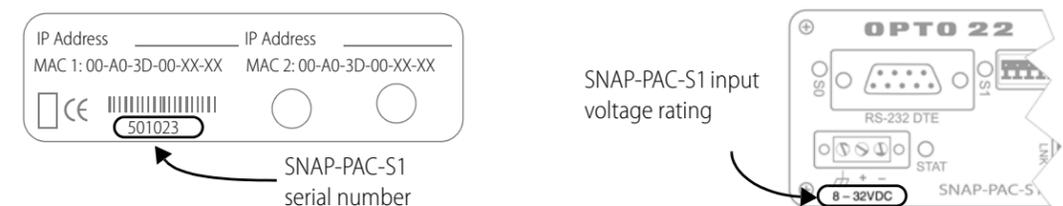

Form 1679-121214 © 2012 Opto 22