

G4 ANALOG VOLTAGE INPUT

Features

- > Provide a single channel of transformer and optically- isolated voltage-to-digital conversion
- > 4000 Vrms Transient Isolation
- > Complete electrical channel-to-channel isolation
- > • 12-bit Resolution
- > Field connections are made via four terminals on the brick base or Modular controller



G4AD6

DESCRIPTION

Opto 22's voltage input modules provide a single channel of transformer and optically- isolated voltage-to-digital conversion. The modules offer wide nominal input range and special over/under range capabilities. Complete electrical channel-to-channel isolation is provided, which eliminates troublesome ground loop problems. Modules plug into an Opto 22 Modular I/O controller or an analog I/O brick and are secured by a captive screw. Field connections are made via four terminals on the brick base or Modular controller.

NOTE: Any system using analog sensors and input modules should be calibrated annually for analog signals. To do so, use OptoControl commands "Calculate and Set Analog Offset" and "Calculate and Set Analog Gain."

GENERAL SPECIFICATIONS

Isolation (Transient) Input-to-Output Input-to-analog Supply	4,000 Vrms 4,000 Vrms
Ambient Temperature Operating Storage	-30° to 70°C -40° to 85°C
Resolution	12 bits

Part Numbers


Part	Description
G4AD6 [OBSOLETE]	[OBSOLETE] G4 0 to +5 VDC Analog Input
G4AD6HS [OBSOLETE]	[OBSOLETE] G4 0 to +5 VDC Analog Input, High Speed
G4AD7 [OBSOLETE]	[OBSOLETE] G4 0 to +10 VDC Analog Input
G4AD7HS [OBSOLETE]	[OBSOLETE] G4 0 to +10 VDC Analog Input, High Speed
G4AD9 [OBSOLETE]	[OBSOLETE] G4 0 to +50 mV Analog Input
G4AD11 [OBSOLETE]	[OBSOLETE] G4 -5 to +5 VDC Analog Input
G4AD12 [OBSOLETE]	[OBSOLETE] G4 -10 to +10 VDC Analog Input
G4AD13 [OBSOLETE]	[OBSOLETE] G4 0 to 100 mV Analog Input
G4AD22 [OBSOLETE]	[OBSOLETE] G4 0 to 1 VDC Analog Input

MODULE SPECIFICATIONS

	G4AD6 [Obsolete]	G4AD6HS [Obsolete]	G4AD7 [Obsolete]	G4AD7HS [Obsolete]	G4AD9 [Obsolete]	G4AD11 [Obsolete]	G4AD12 [Obsolete]	G4AD13 [Obsolete]	G4AD22 [Obsolete]
Nominal Voltage Input	0 to 5 VDC	0 to 5 VDC	0 to 10 VDC	0 to 10 VDC	0 to 50 mV	-5 to +5 VDC	-10 to +10 VDC	0 to 100 mV	0 to 1 VDC
Over/Under Range	-0.3 to 11 VDC	-0.3 to 11 VDC	-0.6 to 22 VDC	-0.6 to 22 VDC	-3.0 to 110 mV	-5.6 to 21 VDC	-11.2 to 42 VDC	-6 to 220 mV	-60 mV to 2.2 VDC
Accuracy*	± 5 mV	± 5 mV	± 10 mV	± 10 mV	± 100 µV	± 10 mV	± 20 mV	± 100 µV	± 1 mV
Response Time									
% Of Scale Change									
5%	8.4 msec	< 3 msec	8.4 msec	< 3 msec	2 msec	8.4 msec	8.4 msec	2 msec	< 3 msec
63%	165 msec	< 3 msec	165 msec	< 3 msec	36 msec	165 msec	165 msec	36 msec	< 10 msec
Agency Approvals	UL, RoHS, CE; UKCA	UL, CE; UKCA	UL, CE; UKCA	UL, CE; UKCA	UL, CE; UKCA	UL, CE; UKCA	UL, NEBS Complaint, CE; UKCA	UL, CE; UKCA	CE; UKCA

* Accuracy figure requires use of gain and offset commands.

CONNECTIONS

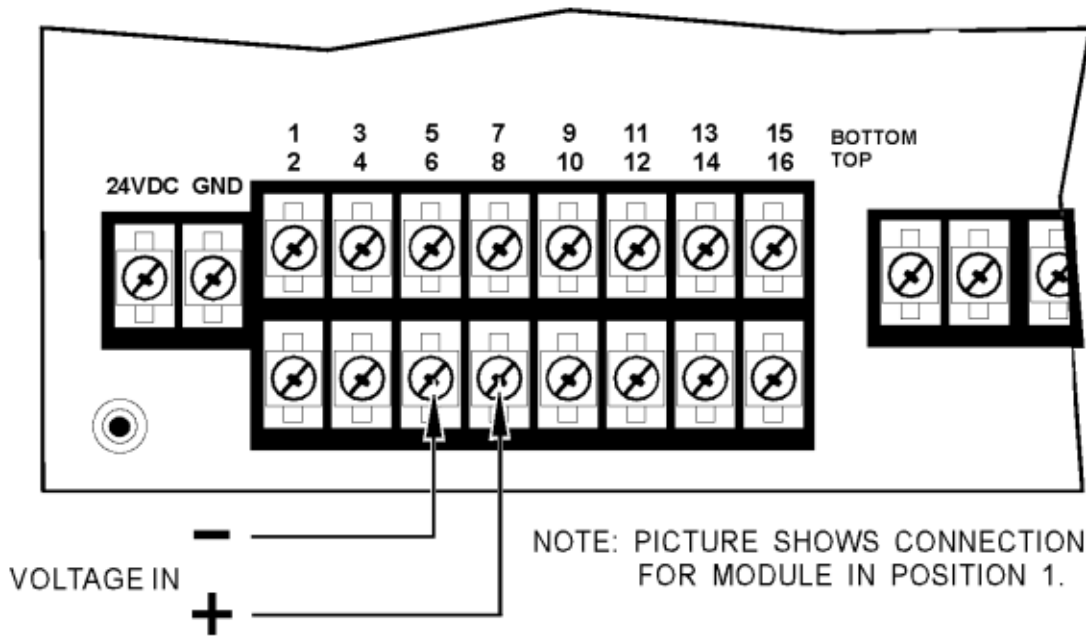

PRODUCTS

Opto 22 develops and manufactures reliable, easy-to-use, open standards-based hardware and software products. Industrial automation, process control, remote monitoring, data acquisition, and industrial internet of things (IIoT) applications worldwide all rely on Opto 22.

groov RIO®

groov RIO edge I/O offers a single, compact, PoE-powered industrial package with web-based configuration and IIoT software built in, support for multiple OT and IT protocols, and security features like a device firewall, data encryption, and user account control.

Standing alone, groov RIO connects to sensors, equipment, and legacy systems, collecting and securely publishing data from field to cloud. Choose a universal I/O model with thousands of possible field I/O configurations, with or without Ignition from Inductive Automation®, or a RIO EMU energy monitoring unit that reports 64 energy data values from 3-phase loads up to 600 VAC, Delta or Wye.

You can even write an IEC 61131-3 compliant control program to run on groov RIO, using CODESYS. You can also use groov RIO with a Modbus/TCP master or as remote I/O for a groov EPIC system.

groov EPIC® System

Opto 22's groov Edge Programmable Industrial Controller (EPIC) system gives you industrially hardened control with a flexible Linux®-based processor with gateway functions, guaranteed-for-life I/O, and software for your automation and IIoT applications.

groov EPIC Processor

The heart of the system is the groov EPIC processor. It handles a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

In addition, the EPIC provides secure data communications among physical assets, control systems, software applications, and online services, both on premises and in the cloud. No industrial PC needed.

Configuring and troubleshooting I/O and networking is easier with the EPIC's integrated high-resolution color touchscreen. Authorized users can manage the system locally on the touchscreen, on a monitor connected via the HDMI or USB ports, or on a PC or mobile device with a web browser.

groov EPIC I/O

groov I/O connects locally to sensors and equipment. Modules have a spring-clamp terminal strip, integrated wireway, swing-away cover, and LEDs indicating module health and discrete channel status. groov I/O is hot swappable, UL Hazardous Locations approved, and ATEX compliant.

groov EPIC Software

The groov EPIC processor comes ready to run the software you need:

- Programming: Choose flowchart-based PAC Control, CODESYS Development System for IEC61131-3 compliant programs, or secure shell access (SSH) to the Linux OS for custom applications
- Node-RED for creating simple IIoT logic flows from pre-built nodes
- Efficient MQTT data communications with string or Sparkplug data formats
- Multiple OPC UA server options
- HMI: groov View to build your own HMI viewable on touchscreen, PCs, and mobile devices; PAC Display for a

Windows HMI; Node-RED dashboard UI

- Ignition or Ignition Edge® from Inductive Automation (requires license purchase) with OPC-UA drivers to Allen-Bradley®, Siemens®, and other control systems, and MQTT communications

Older products

From solid state relays, to world-famous G4 and SNAP I/O, to SNAP PAC controllers, older Opto 22 products are still supported and working hard at thousands of installations worldwide. You can count on us for the reliability and service you expect, now and in the future.

QUALITY

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California.

Because we test each product twice before it leaves our factory rather than testing a sample of each batch, we can afford to guarantee most solid-state relays and optically isolated I/O modules for life.

FREE PRODUCT SUPPORT

Opto 22's California-based Product Support Group offers free technical support for Opto 22 products from engineers with decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Support is always available on our website, including [free online training](#) at OptoU, how-to [videos](#), [user's guides](#), the Opto 22 KnowledgeBase, and [OptoForums](#).

PURCHASING OPTO 22 PRODUCTS

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at **800-321-6786** (toll-free in the U.S. and Canada) or **+1-951-695-3000**, or visit our website at www.opto22.com.

