

### Description

Part Number	Description
G4AD20	0 to 10.8kHz Rate Input

The G4AD20 module provides a single channel of transformer and optically-isolated analog to digital conversion. The nominal input range is 0 to 4,095 Hz with an over range capability to greater than 10,800 Hz. There is an internal pull up supply provided through a 10K ohm resistor. Used with devices that have open collector outputs, this eliminates the need for the user to provide the pull-up voltage supply and associated wiring, barrier strips, etc. The G4AD20 module also includes complete electrical channel-to-channel isolation which eliminates troublesome ground loop problems. The module plugs into the Opto 22 analog brick mounting racks and modular controllers and is secured by a captive screw. The field connections are made via the terminal strip located on the brick base or controller I/O board.

NOTE: Any system using analog sensors and input modules should be calibrated annually for analog signals. To do so, use OptoControl commands "Calculate and Set Analog Offset" and "Calculate and Set Analog Gain."




Form 582-050809

## Specifications

Nominal Input Range	0 to 4,095 Hz
Input Over Range	0 to 10,800 Hz
Resolution	1 Hz (0 to 4,095 Hz) 2 Hz (4,096 to 8,191 Hz) 4 Hz (8,192 to 10,800 Hz)
Input Response Time (% of Span / D V / D Time)	99% (4,054 Hz) 1 Second
DC Common Mode Rejection	-120 dB
AC Common Mode Rejection	-120 dB at 60 Hz
Maximum Operating Common Mode Voltage	750 VDC or peak AC
Input vs Output Zero Scale (1,920 Hz) Full Scale (9,600 Hz)	0 Hz 4,095 Hz
Accuracy	$\pm 2$ Hz or $\pm 0.5\%$ of the input frequency (whichever is greater)
Gain Tempco	200 ppm/ $^{\circ}$ C
Offset Tempco	50 ppm/ $^{\circ}$ C
Input Parameters Hookup A: Input From an Open Collector Output  Hookup B: Input From a Signal Generator sine wave square wave	Collector is pulled up through 10 k $\Omega$ by G4AD20  5 to 24 Vp-p (2.5 to 24 Vp-p with "A" jumper) 0.5 to 24 Vp-p (0.25 to 24 Vp-p with "A" jumper)
Minimum Pulse Width	40 $\mu$ s
Input Impedance	50 k $\Omega$ (- input to + input)
Pull-up Voltage	12 to 15 V
Pull-up Resistor	10 k $\Omega$
Power Requirements	24 VDC ( $\pm 0.5$ V) at 40 mA
Logic Supply	5.5 V maximum at 15 mA
Ambient Temperature Operating Storage	0 $^{\circ}$ to 70 $^{\circ}$ C - 25 $^{\circ}$ to 85 $^{\circ}$ C

Form 582-050809

### Connections

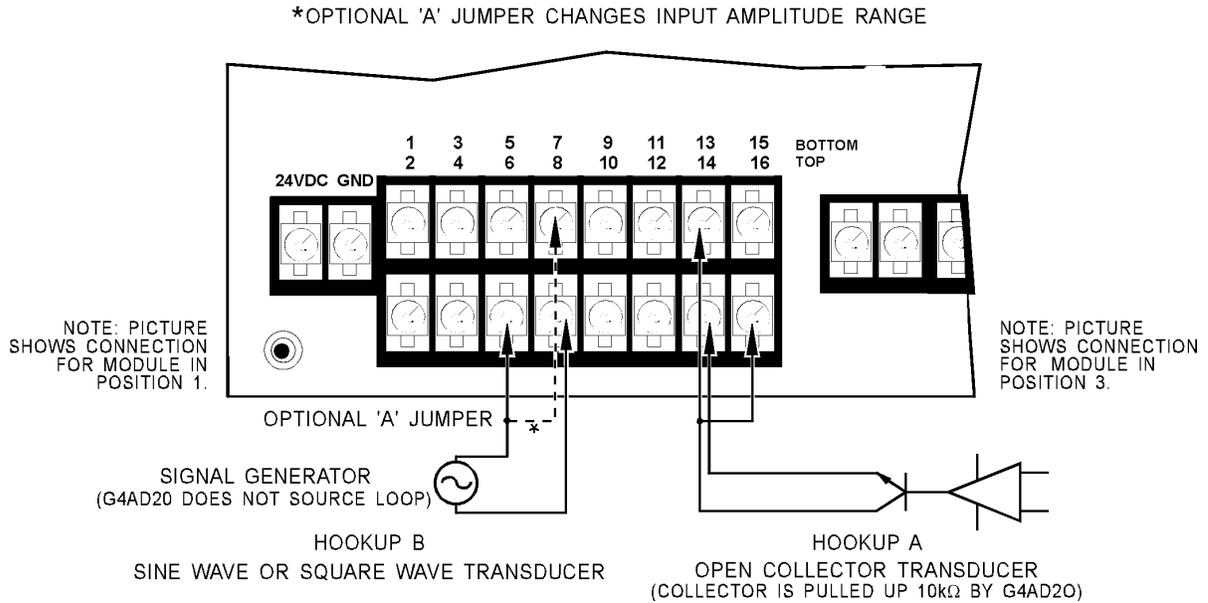

### Products

Opto 22 produces a broad array of reliable, flexible hardware and software products for industrial automation, remote monitoring, enterprise data acquisition, and machine-to-machine (M2M) applications.

### SNAP Ethernet Systems

Based on the Internet Protocol (IP), SNAP Ethernet systems offer flexibility in their network connectivity and in the software applications they work with. The physical network may be a wired Ethernet network, a cellular wireless network, or a modem. A wide variety of software applications can exchange data with SNAP Ethernet systems, including:

- Opto 22's own ioProject™ suite of control and HMI software
- Manufacturing resource planning (MRP), enterprise management, and other enterprise systems
- Human-machine interfaces (HMIs)
- Databases
- Email systems
- OPC client software
- Custom applications
- Modbus/TCP software and hardware.



SNAP Ethernet system hardware consists of controllers and I/O units. Controllers provide central control and data distribution. I/O units provide local connection to sensors and equipment.

### SNAP OEM Systems

Opto 22 SNAP OEM I/O systems are highly configurable, programmable processors intended for OEMs, IT professionals, and others who need to use custom software with Opto 22 SNAP I/O modules.

Linux® applications running on these systems can read and write to analog, simple digital, and serial I/O points on SNAP I/O modules using easily implemented file-based operations. Applications can be developed using several common development tools and environments, including C or C++, Java, and shell scripts.



### M2M Systems

Machine-to-machine (M2M) systems connect your business computer systems to the machines, devices, and environments you want to monitor, control, or collect data from. M2M systems often use wireless cellular communications to link remote facilities to central systems over the Internet, or to provide monitoring and control capability via a cellular phone.

Opto 22's Nvio™ systems include everything you need for M2M—interface and communications hardware, data service plan, and Web portal—in one easy-to-use package. Visit [nvio.opto22.com](http://nvio.opto22.com) for more information.

### Opto 22 Software

Opto 22's ioProject and FactoryFloor® software suites provide full-featured and cost-effective control, HMI, and OPC software to power your Opto 22 hardware. These software applications help you develop control automation solutions, build easy-to-use operator interfaces, and expand your manufacturing systems' connectivity.



### Quality

In delivering hardware and software solutions for worldwide device management and control, Opto 22 retains the highest commitment to quality. We do no statistical testing; each product is made in the U.S.A. and is tested twice before leaving our 160,000 square-foot manufacturing facility in Temecula, California. That's why we can guarantee solid-state relays and optically-isolated I/O modules *for life*.

### Product Support

Opto 22's Product Support Group offers comprehensive technical support for Opto 22 products. The staff of support engineers represents years of training and experience, and can assist with a variety of project implementation questions. Product support is available in English and Spanish from Monday through Friday, 7 a.m. to 5 p.m. PST.

### Opto 22 Web Sites

- [www.opto22.com](http://www.opto22.com)
- [nvio.opto22.com](http://nvio.opto22.com)
- [www.internetio.com](http://www.internetio.com) (live Internet I/O demo)

### Other Resources

- OptoInfo CDs
- Custom integration and development
- Hands-on customer training classes.



### About Opto 22

Opto 22 manufactures and develops hardware and software products for industrial automation, remote monitoring, enterprise data acquisition, and machine-to-machine (M2M) applications. Using standard, commercially available Internet, networking, and computer technologies, Opto 22's input/output and control systems allow customers to monitor, control, and acquire data from all of the mechanical, electrical, and electronic assets that are key to their business operations. Opto 22's products and services support automation end users, OEMs, and information technology and operations personnel.

Founded in 1974 and with over 85 million Opto 22-connected devices deployed worldwide, the company has an established reputation for quality and reliability.