

G4 ANALOG 0-5 AMP, AC/DC CURRENT MODULE

Features

- > Provides a single channel of transformer and optically-isolated analog-to-digital conversion
- > The nominal input range is 0 to 100 volts AC or DC with an over range capability to 263 volts
- > Operating temperature 0° to 70° C

DESCRIPTION

The G4AD25 module provides a single channel of transformer and optically-isolated analog-to-digital conversion. The nominal input range is 0 to 100 volts AC or DC with an over range capability to 263 volts. The G4AD25 module can survive to 500 volts peak applied directly across its inputs. The G4AD25 may be used to monitor 120/240 volt AC/DC and 12/24/48 volt AC/DC system voltage.

The module plugs into an Opto 22 Modular controller or an analog brick and is secured by a captive screw. The field connections are made through four contacts to the terminal strip located on the brick base or controller I/O board.

NOTE: Any system using analog sensors and input modules should be calibrated annually for analog signals. To do so, use OptoControl commands "Calculate and Set Analog Offset" and "Calculate and Set Analog Gain."



G4AD25

*** This product is Obsolete and no longer available. ***

Part Numbers


Part	Description
G4AD25 [OBSOLETE]	[OBSOLETE] G4 0 to 100 VDC/VAC Analog Input

GENERAL SPECIFICATIONS [OBSOLETE]

Nominal Input Range	0 to 100 V true rms AC/DC
Input Over Range	100 V to 263 V
Resolution	24.4 mV from 0 to 100 V 48.8 mV from 100 to 200 V 97.7 mV from 200 to 263.7 V
Input Response Time 5% of scale change 63.2% of scale change 99.9% of scale change	5 Volts/millisecond 63.2 Volts/200 milliseconds 99 Volts/1200 milliseconds
DC Common Mode Rejection	-120 dB
AC Common Mode Rejection	-120 dB @ 60 Hz
Maximum Operating Common Mode Voltage	750 VDC or peak AC
Input vs Output Zero Scale (1,920 Hz) Full Scale (9,600 Hz)	0 V 100 V
Accuracy	0.5 V (0.5%)
DC Reversal	± 0.3 V (0.3%)
Power Requirements	24 VDC (± 0.5 V) @ 40 mA logic supply 5.5 V maximum @ 15 mA
Input Resistance Differential Common Mode	1 MΩ 1,000 MΩ
Ambient Temperature Operating Storage	0° to 70° C -25° to 85° C
Agency Approvals	CE: UKCA
* Accuracy figure requires use of gain and offset commands.	

These products are obsolete.

CONNECTIONS

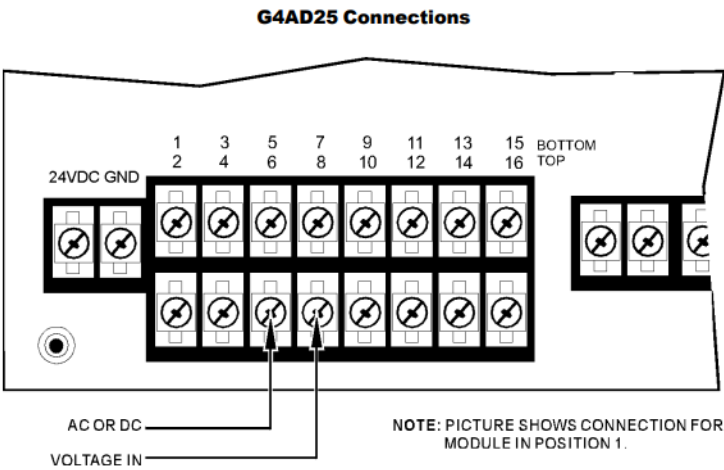

More about Opto 22

OPTO 22

PRODUCTS

Opto 22 develops and manufactures reliable, easy-to-use, open standards-based hardware and software products. Industrial automation, process control, remote monitoring, data acquisition, and industrial internet of things (IIoT) applications worldwide all rely on Opto 22.

groov RIO®

groov RIO edge I/O offers a single, compact, PoE-powered industrial package with web-based configuration and IIoT software built in, support for multiple OT and IT protocols, and security features like a device firewall, data encryption, and user account control.

Standing alone, *groov RIO* connects to sensors, equipment, and legacy systems, collecting and securely publishing data from field to cloud. Choose a universal I/O model with thousands of possible field I/O configurations, with or without Ignition from Inductive Automation®, or a *RIO EMU energy monitoring unit* that reports 64 energy data values from 3-phase loads up to 600 VAC, Delta or Wye.

You can also use *groov RIO* with a Modbus/TCP master or as remote I/O for a *groov EPIC* system.

groov EPIC® System

Opto 22's *groov Edge Programmable Industrial Controller (EPIC) system* gives you industrially hardened control with a flexible Linux®-based processor with gateway functions, guaranteed-for-life I/O, and software for your automation and IIoT applications.

groov EPIC Processor

The heart of the system is the *groov EPIC* processor. It handles a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

In addition, the EPIC provides secure data communications among physical assets, control systems, software applications, and online services, both on premises and in the cloud. No industrial PC needed.

Configuring and troubleshooting I/O and networking is easier with the EPIC's integrated high-resolution color touchscreen. Authorized users can manage the system locally on the touchscreen, on a monitor connected via the HDMI or USB ports, or on a PC or mobile device with a web browser.

groov EPIC I/O

groov I/O connects locally to sensors and equipment. Modules have a spring-clamp terminal strip, integrated wireway, swing-away cover, and LEDs indicating module health and discrete channel status. *groov I/O* is hot swappable, UL Hazardous Locations approved, and ATEX compliant.

groov EPIC Software

The *groov EPIC* processor comes ready to run the software you need:

- Programming: Choose flowchart-based PAC Control, CODESYS Development System for IEC61131-3 compliant programs, or secure shell access (SSH) to the Linux OS for custom applications
- Node-RED for creating simple IIoT logic flows from pre-built nodes
- Efficient MQTT data communications with string or Sparkplug data formats
- Multiple OPC UA server options
- HMI: *groov View* to build your own HMI viewable on touchscreen, PCs, and mobile devices; PAC Display for a

Windows HMI; Node-RED dashboard UI

- Ignition or Ignition Edge® from Inductive Automation (requires license purchase) with OPC-UA drivers to Allen-Bradley®, Siemens®, and other control systems, and MQTT communications

Older products

From solid state relays, to world-famous G4 and SNAP I/O, to SNAP PAC controllers, older Opto 22 products are still supported and working hard at thousands of installations worldwide. You can count on us for the reliability and service you expect, now and in the future.

QUALITY

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California.

Because we test each product twice before it leaves our factory rather than testing a sample of each batch, we can afford to guarantee most solid-state relays and optically isolated I/O modules for life.

FREE PRODUCT SUPPORT

Opto 22's California-based Product Support Group offers free technical support for Opto 22 products from engineers with decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Support is always available on our website, including [free online training](#) at OptoU, how-to [videos](#), [user's guides](#), the Opto 22 KnowledgeBase, and [OptoForums](#).

PURCHASING OPTO 22 PRODUCTS

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at **800-321-6786** (toll-free in the U.S. and Canada) or **+1-951-695-3000**, or visit our website at www.opto22.com.

