STANDARD AC INPUT MODULES

Features

- > Rugged construction
- > High noise rejection and transient-free clean switching
- > 4000 volts of optical isolation between the field inputs and the logic output of the circuit (transient)

DESCRIPTION

AC input modules are used for sensing ON/OFF alternating current (AC) voltage levels. All AC input modules are designed with filtering on the input and a hysteresis amplifier for high noise rejection and transient-free *clean* switching.

Each module provides up to 4000 volts (transient) of optical isolation between the field inputs and the logic output of the circuit.

Typical uses and applications include sensing the presence or absence of voltage or sensing contact closures from sources such as:

- Proximity switches
- Limit switches
- Float switches
- Selector switches
- Push buttons
- Toggle switches
- Thermostats



IAC5 Module

Part Numbers

| Part | Description |
|---------|------------------------------------|
| IDC5* | DC Input 10–32 VDC, 5 VDC Logic |
| IDC5G* | DC Input 35–60 VDC, 5 VDC Logic |
| IAC5 | AC Input 90-140 VAC, 5 VDC Logic |
| IAC5A | AC Input 180-280 VAC, 5 VDC Logic |
| IDC15* | DC Input 10-32 VDC, 15 VDC Logic |
| IAC15 | AC Input 90-140 VAC, 15 VDC Logic |
| IAC15A* | AC Input 180-280 VAC, 15 VDC Logic |
| IDC24* | DC Input 10–32 VDC, 24 VDC Logic |
| IAC24 | AC Input 90-140 VAC, 24 VDC Logic |
| IAC24A | AC Input 180-280 VAC, 24 VDC Logic |

^{*} These DC input modules can be used for AC input signals. See table on page 2.



SPECIFICATIONS

General


| Operating Ambient | -30 to 70 °C | | | | |
|--|-------------------------|--|--|--|--|
| Isolation, Input-to-Output (Transient) | 4000 volts | | | | |
| Output Voltage Drop | 0.4 volts @ 50 mA | | | | |
| Output Current | 50 mA | | | | |
| Output Leakage With No Input | 0.1 mA @ 30 VDC | | | | |
| Output Transistor | 30 volts breakdown | | | | |
| Agency Approvals | UL, CE, CSA, RoHS, UKCA | | | | |

AC Input Module Specifications

| | Unit | IDC5 | IDC5G | IDC15* | IDC24* | IAC5 | IAC15* | IAC24* | IAC5A | IAC15A* | IAC24A* |
|---|-------|-------|--------|--------|--------|--------|--------|--------|---------|---------|---------|
| Input Voltage Range | VAC | 12–32 | 35–60 | 12–32 | 12–32 | 90–140 | 90–140 | 90–140 | 180–280 | 180–280 | 180–280 |
| Input Current @ Max Line | mA | 25 | 6 | 25 | 25 | 5 | 5 | 5 | 5.0 | 5.0 | 5.0 |
| Turn-on Time | msec | 5 | 10 | 5 | 5 | 20 | 20 | 20 | 20 | 20 | 20 |
| Turn-off Time | msec | 5 | 15 | 5 | 5 | 20 | 20 | 20 | 20 | 20 | 20 |
| Input Allowed for No Output | mA, V | 1, 3 | 0.7, 7 | 1, 3 | 1, 3 | 3, 45 | 3, 45 | 3, 45 | 1.7, 80 | 1.7, 80 | 1.7, 80 |
| Output Supply Voltage-Nominal | VDC | 5 | 5 | 15 | 24 | 5 | 15 | 24 | 5 | 15 | 24 |
| Output Supply Voltage-Range | VDC | 4.5–6 | 4.5–6 | 12–18 | 20–30 | 4.5–6 | 12–18 | 20–30 | 4.5–6 | 12–18 | 20–30 |
| Output Supply Current @ Nominal Logic Voltage | mA | 12 | 12 | 15 | 15 | 12 | 15 | 15 | 12 | 15 | 15 |
| Input Resistance (R1 in schematic diagram) | Ohms | 1.5k | 10k | 1.5k | 1.5k | 28k | 28k | 28k | 70k | 70k | 70k |
| Control Resistance | Ohms | 220 | 220 | 1k | 2.2k | 220 | 1k | 2.2k | 220 | 1k | 2.2k |
| * Not for use with Opto 22 brains. | | | | | | | | | | | |




Dimensions

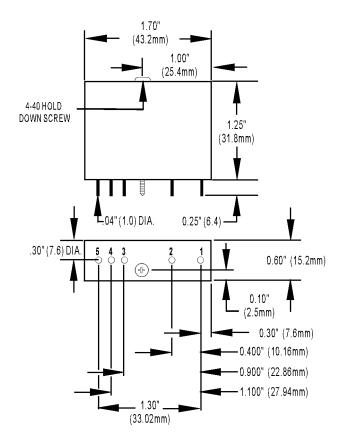




SCHEMATICS

AC Input Schematic

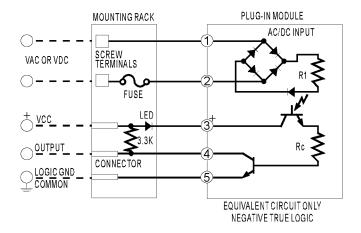

CONNECTIONS

AC Input Connection Diagram

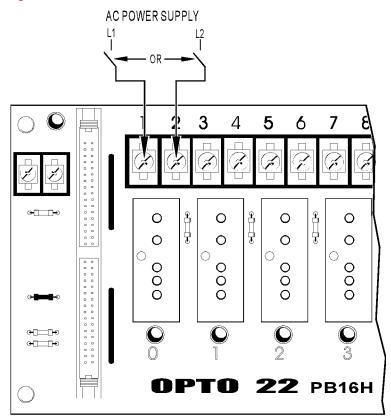



More about Opto 22

OPTO 22

PRODUCTS

Opto 22 develops and manufactures reliable, easy-to-use, open standards-based hardware and software products. Industrial automation, process control, remote monitoring, data acquisition, and industrial internet of things (IIoT) applications worldwide all rely on Opto 22.

groov RIO®

groov RIO edge I/O offers a single, compact, PoE-powered industrial package with web-based configuration and IIoT software built in, support for multiple OT and IT protocols, and security features like a device firewall, data encryption, and user account control.

Standing alone, *groov* RIO connects to sensors, equipment, and legacy systems, collecting and securely publishing data from field to cloud. Choose a universal I/O model with thousands of possible field I/O configurations, with or without Ignition from Inductive Automation®, or a RIO EMU energy monitoring unit that reports 64 energy data values from 3-phase loads up to 600 VAC, Delta or Wye.

You can also use *groov* RIO with a Modbus/TCP master or as remote I/O for a *aroov* EPIC system.

groov EPIC® System

Opto 22's *groov* Edge Programmable Industrial Controller (EPIC) system gives you industrially hardened control with a flexible Linux®-based processor with gateway functions, guaranteed-for-life I/O, and software for your automation and IIoT applications.

groov EPIC Processor

The heart of the system is the *groov* EPIC processor. It handles a wide range of digital, analog, and serial functions for data collection, remote monitoring, process control, and discrete and hybrid manufacturing.

In addition, the EPIC provides secure data communications among physical assets, control systems, software applications, and online services, both on premises and in the cloud. No industrial PC needed.

Configuring and troubleshooting I/O and networking is easier with the EPIC's integrated high-resolution color touchscreen. Authorized users can manage the system locally on the touchscreen, on a monitor connected via the HDMI or USB ports, or on a PC or mobile device with a web browser.

groov EPIC I/O

groov I/O connects locally to sensors and equipment. Modules have a spring-clamp terminal strip, integrated wireway, swing-away cover, and LEDs indicating module health and discrete channel status. groov I/O is hot swappable, UL Hazardous Locations approved, and ATEX compliant.

groov EPIC Software

The *groov* EPIC processor comes ready to run the software you need:

- Programming: Choose flowchart-based PAC Control, CODESYS Development System for IEC61131-3 compliant programs, or secure shell access (SSH) to the Linux OS for custom applications
- Node-RED for creating simple IIoT logic flows from pre-built nodes
- Efficient MQTT data communications with string or Sparkplug data formats
- HMI: groov View to build your own HMI viewable on touchscreen, PCs, and mobile devices; PAC Display for a Windows HMI; Node-RED dashboard UI
- Ignition or Ignition Edge® from Inductive Automation (requires license purchase) with OPC-UA drivers to Allen-Bradley®, Siemens®, and other control systems, and MQTT communications

Older products

From solid state relays, to world-famous G4 and SNAP I/O, to SNAP PAC controllers, older Opto 22 products are still supported and working hard at thousands of installations worldwide. You can count on us for the reliability and service you expect, now and in the future.

QUALITY

Founded in 1974, Opto 22 has established a worldwide reputation for high-quality products. All are made in the U.S.A. at our manufacturing facility in Temecula, California.

Because we test each product twice before it leaves our factory rather than testing a sample of each batch, we can afford to guarantee most solid-state relays and optically isolated I/O modules for life.

FREE PRODUCT SUPPORT

Opto 22's California-based Product Support Group offers free technical support for Opto 22 products from engineers with decades of training and experience. Support is available in English and Spanish by phone or email, Monday–Friday, 7 a.m. to 5 p.m. PST.

Support is always available on our website, including free online training at OptoU, how-to videos, user's guides, the Opto 22 KnowledgeBase, and OptoForums.

PURCHASING OPTO 22 PRODUCTS

Opto 22 products are sold directly and through a worldwide network of distributors, partners, and system integrators. For more information, contact Opto 22 headquarters at **800-321-6786** (toll-free in the U.S. and Canada) or **+1-951-695-3000**, or visit our website at www.opto22.com.

OPTO 22 · www.opto22.com 43044 Business Park Dr. Temecula, CA 92590-3614 **SALES •** sales@opto22.com 800-321-6786 • 1-951-695-3000

SUPPORT • support@opto22.com 800-835-6786 • 1-951-695-3080

